

Comax Series 1450



Certified for:

- Usage cycles
200.000 cycles
- Insulation from smoke
1,12 m³ / h / m - 25 Pa

Protects from:

- Air
- Water
- Light
- Insects

Not an obstacle for disabled persons

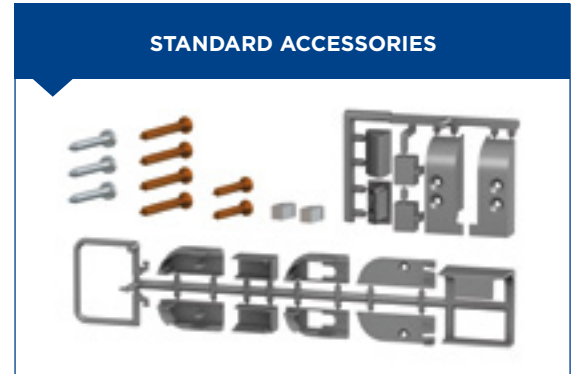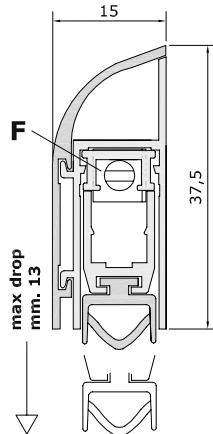


Standard measurements (mm)	330	430	530	630	730	830	930	1030	1130	1230	1330
Max shortening (mm) Z	80	120	200	200	200	200	200	200	200	200	200

FASTENING SYSTEMS



APPLICATIONS

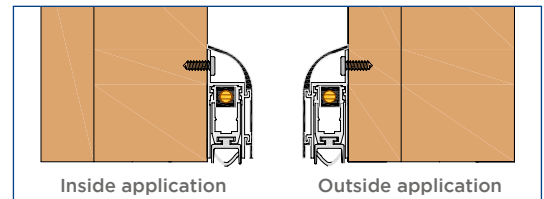

• **FEATURES** Mechanism with a single adjustment (screw F: descent) characterised by the controlled movement of the moving profile with gasket (immediate descent from the hinge side of the door and consequent gradual descent for the entire length) for adjustment to the floor.

• **COMPONENTS** Extruded profiles in aluminium alloy 6060, anodized or painted - EPDM tubular gasket - elements printed in self-lubricating nylon + nylon reinforced with 30% glass fibre - threaded rods in burnished iron - 7 mm hexagonal button and Ø 6 mm brass bushing - coil springs in treated stainless steel.

• **COLOURS** Anodized: bronze, silver.
Painted: white RAL1013, white RAL 9010, brown RAL 8017, black.

• **VARIATIONS ON REQUEST**
Gasket: silicon tubular.

STANDARD PACKAGING

Cardboard box with 10 packages complete with standard accessories and assembly instructions

APPLICATIONS

Wood door



Armoured door



Aluminium door

